GRAPHIC SCALE IN FEET
0 200 400 600

NOTE: THIS PLAT HAS BEEN REVIEWED AND APPROVED BY THE BOARD OF COMMISSIONERS OF BURKE COUNTY.

William J Stevens
COUNTY BUILDING OFFICIAL

LEGEND

1. IPF – IRON PIPE FOUND
2. IPS – IRON PIPE SET
3. AIF – ANGLE IRON FOUND
4. AIS – ANGLE IRON SET
5. CTF – CRIMPED TOP PIPE FOUND
6. CMF – CONC. MONUMENT FOUND
7. CMS – CONC. MONUMENT SET
8. RBF – REBAR FOUND
9. RBS – REBAR SET
10. SQIF – SQUARE IRON FOUND
11. OTF – OPEN TOP PIPE FOUND
12. RRI – RAILROAD IRON
13. CSS – COTTON SPIKE SET
14. CSF – COTTON SPIKE FOUND
15. –x–x– – FENCE
16. --F-- – FLOOD HAZARD

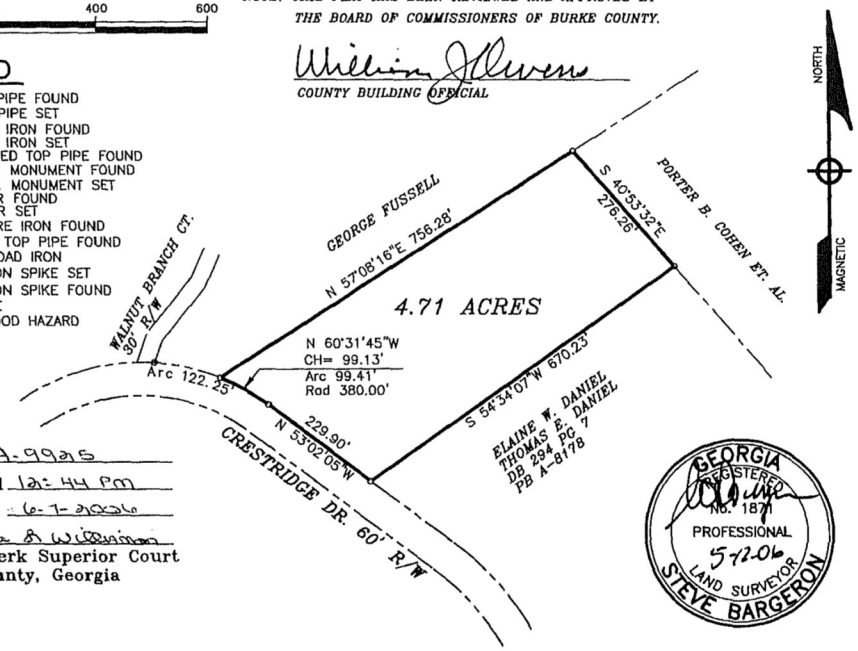

File No. A-9925
Hour Filed 12:44 PM
Date Filed 6-7-2006
Brenda B Williams
Deputy Clerk Superior Court
Burke County, Georgia

GEORGIA REGISTERED No. 1871 PROFESSIONAL 5-12-06 LAND SURVEYOR STEVE BARGERON

PLAT OF SURVEY FOR

SHAWN BLACK

BEING LOT 20, BARRETT PLANTATION WEST
AND LOCATED IN THE 62nd. G.M.D.

BURKE COUNTY, GEORGIA

SCALE: 1" = 200' MAY 12, 2006

Prepared by
STEVE BARGERON & ASSOCIATES
WAYNESBORO, GEORGIA (706)554-2582

85201
85201LOT20.DWG
TAX MAP 64 PAR 77

NOTES

1. THIS SURVEY WAS PERFORMED WITH A TOPCON GTS 303 TOTAL STATION AND 100' STEEL TAPE.
2. FIELD WORK REQUIRED TO PREPARE THIS PLAT WAS PERFORMED RADIALLY USING CONTROL FROM A PREVIOUS SURVEY WITH A CLOSURE PRECISION OF ONE FOOT IN 21,680 FEET AND AN ANGULAR ERROR OF 00°00'02" PER POINT AND WAS ADJUSTED BY LEAST SQUARES.
3. THIS PLAT HAS A CLOSURE PRECISION THAT EXCEEDS ONE FOOT IN 100,000 FEET.